


Superior Series(PS) 120mmx120mmx25mm




- Bearing Type : Ball Bearing
- Function Type (Optional) : FG Signal, RD Signal, PWM
- Protection :
Auto Restart Protection, Polarity Reverse Protection
- Lead Wire:
UL 1007 AWG #24 OR Equivalent
Red Wire : Positive (+)
Black Wire : Negative (-)
Yellow Wire : FG Signal
White Wire : RD Signal
Blue Wire : PWM

DIMENSIONS DRAWING

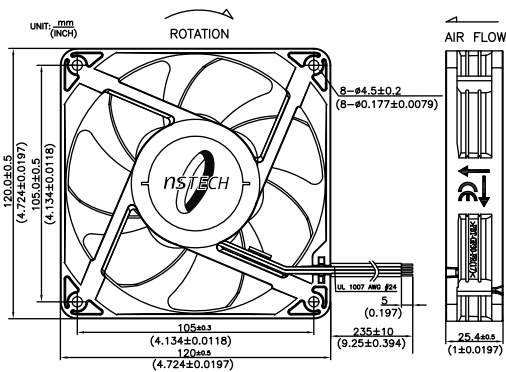

PERFORMANCE CURVES

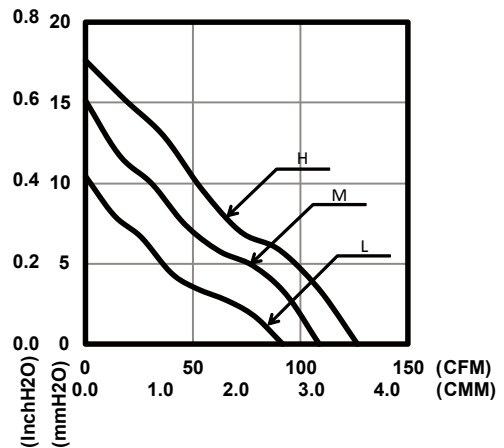

PS SERIES

Specification

Model	Function Type	Rated Voltage	Operating Voltage	Rated Current	Input Current	Input Power	Rated Speed	Air Flow		Air Pressure		Noise
		VDC	VDC	Amp	Amp	Watt	RPM	CMM	CFM	mmH ₂ O	InH ₂ O	dBA
PSAD1A225BL	P000/PF00	12	6~13.8	0.35	0.28	3.36	2900	2.60	91.8	10.43	0.41	42.0
PSAD1A225BM	PR00/M000	12	6~13.8	0.53	0.39	4.68	3500	3.09	109.0	15.16	0.60	47.0
PSAD1A225BH	MF00/MR00	12	6~13.8	0.79	0.59	7.08	4100	3.59	126.9	17.62	0.69	51.5
PSAD2A225BL	P000/PF00	24	16~27.6	0.19	0.15	3.60	2900	2.60	91.8	10.43	0.41	42.0
PSAD2A225BM	PR00/M000	24	16~27.6	0.26	0.21	5.04	3500	3.09	109.0	15.16	0.60	47.0
PSAD2A225BH	MF00/MR00	24	16~27.6	0.39	0.31	7.44	4100	3.59	126.9	17.62	0.69	51.5
PSAD4A225BL	P000/PF00	48	30~55.2	0.10	0.08	3.84	2900	2.60	91.8	10.43	0.41	42.0
PSAD4A225BM	PR00/M000	48	30~55.2	0.15	0.12	5.76	3500	3.09	109.0	15.16	0.60	47.0
PSAD4A225BH	MF00/MR00	48	30~55.2	0.23	0.17	8.16	4100	3.59	126.9	17.62	0.69	51.5



* Specifications are subject to change without notice