



# B6015I Series 60mmx60mmx15mm





- Bearing Type : Long Life, Sleeve
- Function Type (Optional) : FG Signal, RD Signal
- Protection :
  - Auto Restart Protection
- Lead Wire :
  - UL 1095 AWG #28 OR Equivalent
  - Red Wire : Positive (+)
  - Black Wire : Negative (-)
  - Yellow Wire : FG Signal
  - White Wire : RD Signal



## PERFORMANCE CURVES

## DIMENSIONS DRAWING

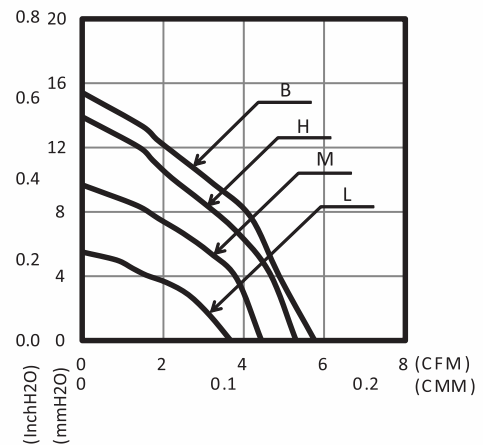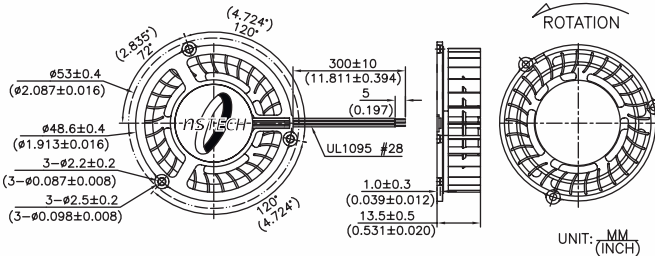

Specification		Rated Voltage	Operating Voltage	Rated Current	Input Current	Input Power	Rated Speed	Air Flow		Air Pressure		Noise
Model	Function							VDC	VDC	Amp	Amp	
PABD16015S L (-) Yxxx	0000/P000 F000/R000 PF00/PRO0	12	6~13.8	0.08	0.08	0.96	2500	0.10	3.68	5.51	0.22	12.5
PABD16015S M (-) Yxxx		12	6~13.8	0.15	0.13	1.56	3000	0.13	4.45	9.71	0.38	18.0
PABD16015S H (-) Yxxx		12	6~13.8	0.22	0.19	2.28	3500	0.15	5.30	13.90	0.55	22.5
PABD16015S B (-) Yxxx		12	6~13.8	0.35	0.24	2.88	3800	0.16	5.75	15.40	0.61	25.5

\* Function type : Y is the 1st letter of suffix number of model number which denotes special models designed for specific applications. x denotes unassigned suffix number of model number. Final model number will be followed by 4-digit suffix number upon completion of customization. Please contact us for customization consultation.  
 \* The data shows typical value at rated voltage.  
 \* Sound level is measured at the distance of one meter from fan intake side.  
 \* Specifications are subject to change without notice.