

B6015II Series 60mmx60mmx15mm





- Bearing Type : Ball Bearing
- Function Type (Optional) : FG Signal, RD Signal
- Lead Wire :
 UL 1095 AWG #28 OR Equivalent
 Red Wire : Positive (+)
 Black Wire : Negative (-)
 Yellow Wire : FG Signal
 White Wire : RD Signal



PERFORMANCE CURVES

DIMENSIONS DRAWING

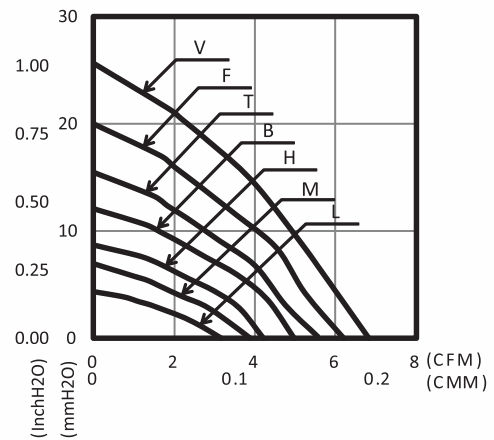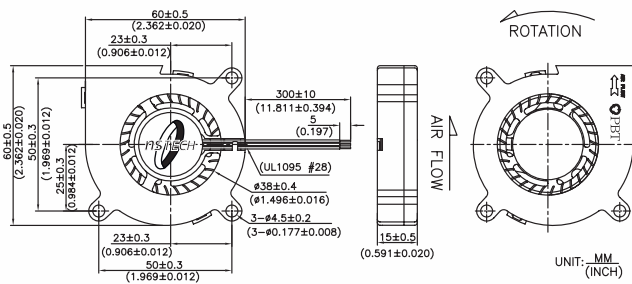

BLOWER FAN

Specification												
Model	Function	Rated Voltage	Operating Voltage	Rated Current	Input Current	Input Power	Rated Speed	Air Flow		Air Pressure		Noise
		VDC	VDC	Amp	Amp	Watt	RPM	CMM	CFM	mmH ₂ O	InH ₂ O	dBA
PABD16015BL Yxxx	0000/P000 F000/R000 PF00/PR00	12	9~13.8	0.08	0.05	0.60	2500	0.09	3.18	4.40	0.17	19.0
PABD16015BM Yxxx		12	6~13.8	0.15	0.08	0.96	3000	0.11	3.88	6.99	0.28	24.0
PABD16015BH Yxxx		12	6~13.8	0.22	0.10	1.20	3500	0.12	4.20	8.70	0.34	29.0
PABD16015BB Yxxx		12	6~13.8	0.35	0.12	1.44	4000	0.14	4.96	12.14	0.48	32.5
PABD16015BT Yxxx		12	6~13.8	0.4	0.18	2.16	4500	0.16	5.55	15.50	0.61	36.0
PABD16015BF Yxxx		12	6~13.8	0.45	0.27	3.24	5000	0.18	6.21	20.00	0.79	39.0
PABD16015BV Yxxx		12	6~13	0.5	0.23	2.76	5500	0.19	6.84	25.70	1.01	41.5

* Function type : Y is the 1st letter of suffix number of model number which denotes special models designed for specific applications. x denotes unassigned suffix number of model number. Final model number will be followed by 4-digit suffix number upon completion of customization. Please contact us for customization consultation.
 * The data shows typical value at rated voltage.
 * Sound level is measured at the distance of one meter from fan intake side.
 * Specifications are subject to change without notice.