

B7530 Series 75mmx75mmx30mm





- Bearing Type : Ball Bearing
- Function Type (Optional) : FG Signal, RD Signal, PWM
- Protection :
Auto Restart Protection
- Lead Wire :
UL 1007 AWG #26 OR Equivalent
Red Wire : Positive (+)
Black Wire : Negative (-)
Yellow Wire : FG Signal
White Wire : RD Signal
Blue Wire : PWM



PERFORMANCE CURVES

DIMENSIONS DRAWING

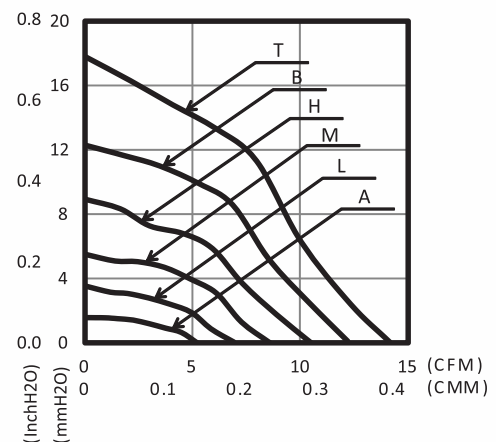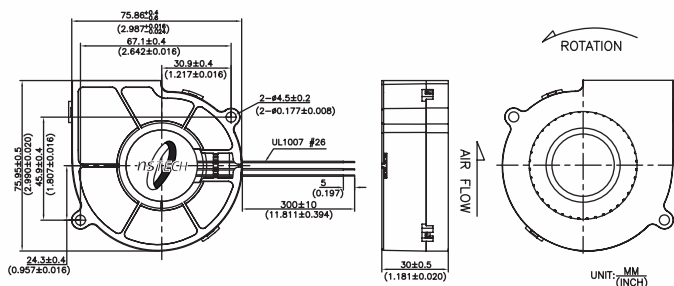

Specification		Rated Voltage	Operating Voltage	Rated Current	Input Current	Input Power	Rated Speed	Air Flow		Air Pressure		Noise
Model	Function							VDC	VDC	Amp	Amp	
PABD17532BA - Yxxx	P000/PF00 PR00/MO00 MF00/MR00	12	6~13.8	0.10	0.09	1.08	1500	0.15	5.20	1.6	0.06	19.0
PABD17532BL - Yxxx		12	6~13.8	0.13	0.11	1.32	2000	0.19	6.87	3.5	0.14	27.5
PABD17532BM - Yxxx		12	6~13.8	0.20	0.15	1.80	2500	0.24	8.57	5.5	0.22	24.0
PABD17532BH - Yxxx		12	6~13.8	0.30	0.23	2.76	3000	0.28	9.86	10.1	0.40	39.5
PABD17532BB - Yxxx		12	6~13.8	0.38	0.28	3.36	3500	0.34	12.18	12.3	0.48	44.0
PABD17532BT - Yxxx		12	6~13.8	0.60	0.51	6.12	4000	0.40	14.14	17.8	0.70	46.5
PABD27532BB - Yxxx		24	12~27.6	0.27	0.23	5.52	3500	0.34	12.18	12.3	0.48	44.0

* Function type : Y is the 1st letter of suffix number of model number which denotes special models designed for specific applications. x denotes unassigned suffix number of model number. Final model number will be followed by 4-digit suffix number upon completion of customization. Please contact us for customization consultation.
 * The data shows typical value at rated voltage.
 * Sound level is measured at the distance of one meter from fan intake side.
 * Specifications are subject to change without notice.