B9225 Series
92mmx92mmx25mm

- Bearing Type : Long Life, Sleeve
- Function Type (Optional) : FG Signal, RD Signal, PWM
- Protection :
  Auto Restart Protection
- Lead Wire :
  UL 1007 AWG #24 OR Equivalent
  Red Wire : Positive (+)
  Black Wire : Negative (-)
  Yellow Wire : FG Signal
  White Wire : RD Signal
  Blue Wire : PWM

Dimensions Drawing

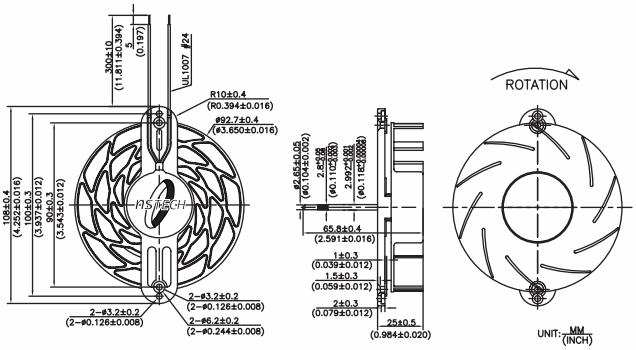

Performance Curves

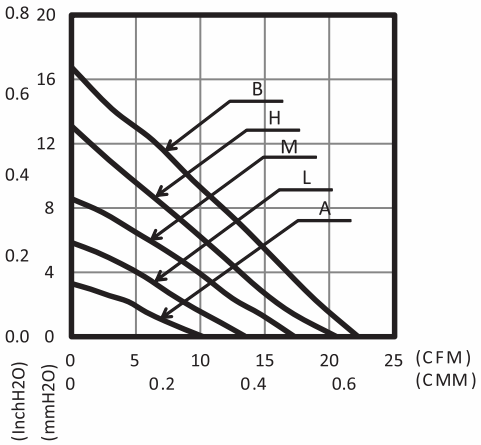

BLOWER FAN

Specification												
Model	Function	Rated Voltage	Operating Volatge	Rated Current	Input Current	Input Power	Rated Speed	Air Flow		Air Pressure		Noise
		VDC	VDC	Amp	Amp	Watt	RPM	CMM	CFM	mmH_2O	InH_2O	dBA
PABD19225SA(-) Yxxx	0000/P000 F000/R000 PF00/PR00 M000/MF00 MR00	12	8~13.8	0.10	0.06	0.72	1200	0.29	10.2	3.29	0.13	22.5
PABD19225SL(-) Yxxx		12	8~13.8	0.18	0.10	1.20	1600	0.38	13.4	5.85	0.23	27.0
PABD19225SM(-) Yxxx		12	8~13.8	0.28	0.25	3.00	2000	0.49	17.3	8.58	0.34	33.5
PABD19225S(F)H- Yxxx		12	8~13.8	0.50	0.32	3.84	2400	0.58	20.5	13.10	0.52	37.0
PABD19225SB Yxxx		12	8~13.8	0.90	0.58	6.96	2800	0.69	24.5	16.35	0.64	42.0
PABD19225SB- Yxxx		12	8~12.6	0.90	0.58	6.96	2800	0.63	22.2	16.77	0.66	41.0

* Function type : Y is the 1st letter of suffix number of model number which denotes special models designed for specific applications. x denotes unassigned suffix number of model number. Final model number will be followed by 4-digit suffix number upon completion of customization. Please contact us for customization consultation.
* The data shows typical value at rated voltage.
* Sound level is measured at the distance of one meter from fan intake side.
* Specifications are subject to change without notice.