


Excellence Series(PE) 40mmx40mmx28mm




- Bearing Type : Ball Bearing
- Function Type (Optional) : FG Signal, RD Signal, PWM
- Protection :
Auto Restart Protection, Polarity Reverse Protection
- Lead Wire :
UL 1061 AWG #26 OR Equivalent
Red Wire : Positive (+)
Black Wire : Negative (-)
Yellow Wire : FG Signal
White Wire : RD Signal
Blue Wire : PWM

DIMENSIONS DRAWING

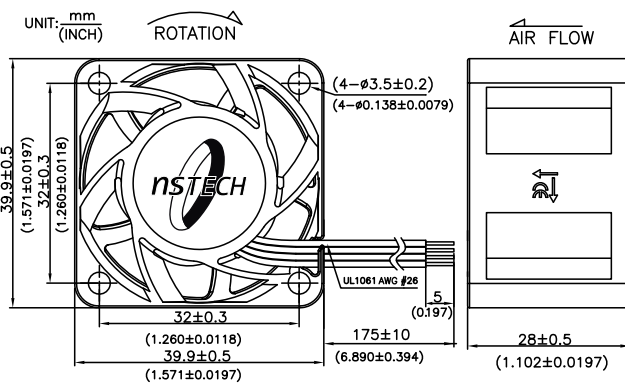

PERFORMANCE CURVES

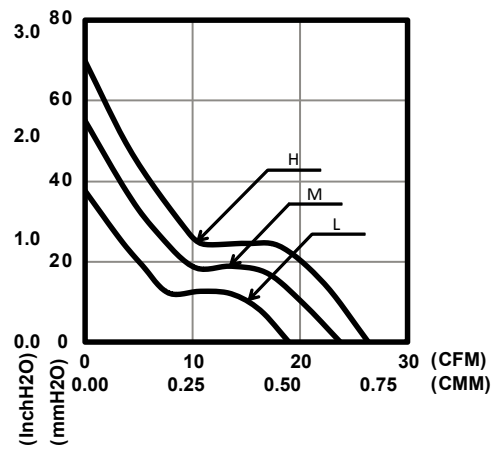

Specification		Rated Voltage VDC	Operating Voltage VDC	Rated Current Amp	Input Current Amp	Input Power Watt	Rated Speed RPM	Air Flow		Air Pressure		Noise dBA
Model	Function Type							CMM	CFM	mmH ₂ O	InH ₂ O	
PEAD14028BL	P000/PF00	12	6~13.8	0.58	0.46	5.52	14600	0.54	19.0	37.5	1.48	52.5
PEAD14028BM	PR00/M000	12	6~13.8	0.81	0.65	7.80	17600	0.67	23.8	55.0	2.16	56.5
PEAD14028BH	MF00/MR00	12	6~13.8	1.02	0.81	9.72	20000	0.75	26.4	69.9	2.75	59.5

* Specifications are subject to change without notice